



Conforme a EN 13229 – EN 13229 Compliant

Scheda Tecnica – Technical data sheet

WDD-1





Descrizione / Description:

Forno a legna con piano di cottura 40x60cm capace di cucinare 1 pizza in soli 2 minuti. Il forno è composto da una camera interna in acciaio inox isolata da fibra ecologica e racchiusa esternamente da un pannello calandrato in lamiera. La base invece è formata da uno strato in silicato di calcio ed uno strato in pietra refrattaria per la cottura della pizza. La porta è in vetro ceramicato e funziona con un meccanismo d'apertura a ribalta.

Wood oven with cooking floor 40x60cm has cooking capacity of 1 pizza in 2 minutes only. The oven is composed by a stainless steel internal cavity, insulated by ecological fiber. The base is formed by a calcium silicate layer and a firestone layer for the cooking of the pizzas. The external cover is made of stainless steel or powder coated steel resistant to high temperature. The door is made in ceramic glass and it works with a “drop-down” opening mechanism.

Dimensions:

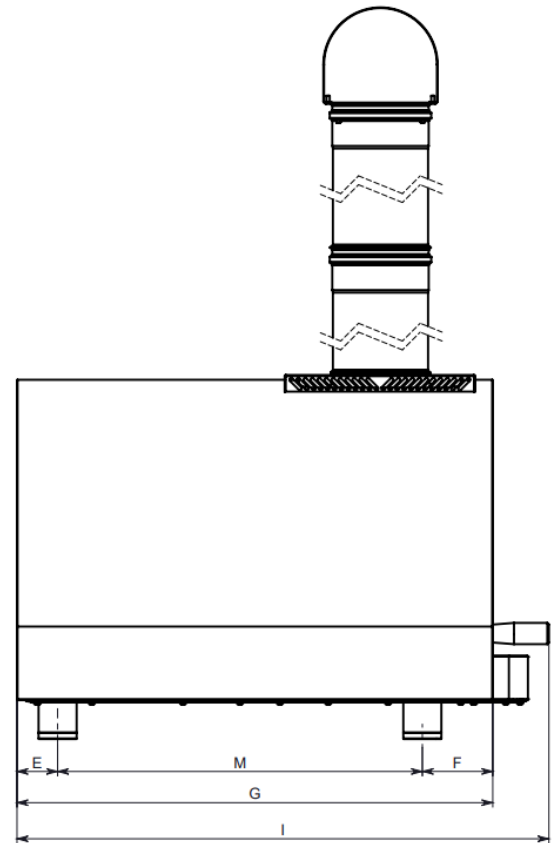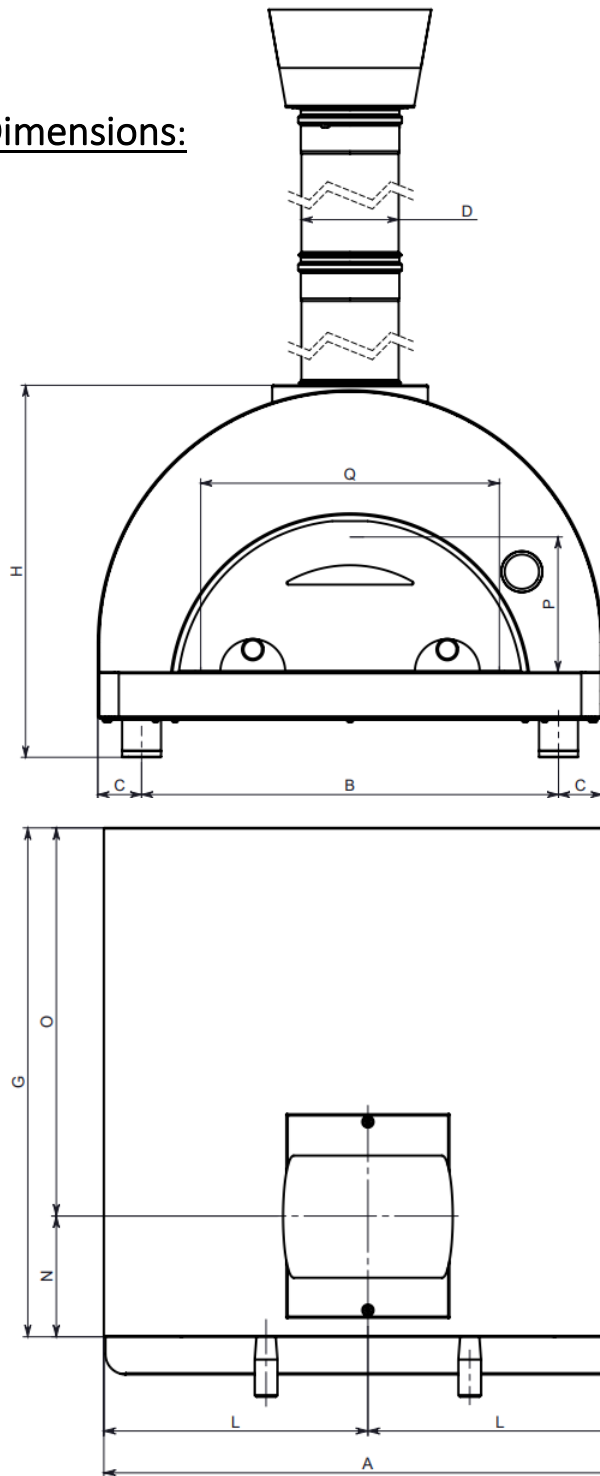

		1 pizza oven	2 pizzas oven	5 pizzas oven			1 pizza oven	2 pizzas oven	5 pizzas oven
A	cm	73	77,8	116	I	cm	63,85	83,85	113,55
	Inch	28,74	30,63	45,67		Inch	25,14	33,01	44,7
B	cm	64	64,3	104,7	L	cm	36,5	38,9	58
	Inch	25,2	25,32	41,22		Inch	14,37	15,31	22,83
C	cm	4,5	6,75	5,65	M	cm	37,5	57,5	87,2
	Inch	1,77	2,66	2,22		Inch	14,76	22,64	34,33
D	cm	13	15	18	N	cm	25,4	17,8	21,3
	Inch	5,12	5,9	7,09		Inch	10	7	8,39
E	cm	6,4	6,4	6,4	O	cm	29,6	57,2	83,4
	Inch	25,2	25,2	25,2		Inch	11,65	22,52	32,83
F	cm	11,1	11,1	11,1	P	cm	14,75	20,85	23
	Inch	4,37	4,37	4,37		Inch	5,81	8,21	9,06
G	cm	55	75	104,7	Q	cm	40	46	79,15
	Inch	21,65	29,53	41,22		Inch	15,75	18,11	31,16
H	cm	49,4	57,4	61,9					
	Inch	19,45	22,6	24,37					

Technical Information:

Alimentazione - Supply	Legna - Wood
Capacità pizze - Pizzas capacity	1
Dim. piano forno - Oven floor dim.	60 x 40 cm 23,62 x 15,75 inch
Peso - Weight	54,06 Kg - 119,18 lbs
Tempo di riscaldamento - Heating time (min)	10 min.
Temperatura massima - Max temperature	500°C - 1000°F
Consumo orario di combustibile - Fuel hourly consumption	6,9 Kg/h - 15,2 lbs/h
Tiraggio minimo necessario - Necessary flue draught	10 Pa
Temperatura fumi - Flue gas temperature	394,5°C - 742,1°F
Flusso massico dei fumi - Flue gas mass flow	57,7 g/s
Emissioni di CO al 13% di O ₂ - CO emission at 13% O ₂	%0,315 - 3843,2 mg/Nm ³